




# Vogne WALL UNIT


**600 Microwave Assembly Guide** 




#### **BEFORE YOU START**


INSTALLATION **SHOULD BE PERFORMED BY A** COMPETENT PERSON ONLY.

THIS PRODUCT COULD **BE DANGEROUS** IF INCORRECTLY INSTALLED






x2 End Panel



x3 Base Panel



Frontal (packed separately) x1



**Hanging Bracket** x2 Inc Screws




Hanging Bracket Plate x2 (Screws Not Included)




**Hinge Mounting Plate** x2 Inc Screws



Hinge x2 Inc Screws



**Hanging Bracket** Cover Cap x2



x2 inc. Screws



(G) x12 Cam Dowel (Expanding)



Cam Lock



Screw

(<del>4</del>E) (K) x6 30mm

Screw



15mm

Screw



(M) x4

Cover Cap



Door

(N) x1



(FF) x2 L Bracket

SML





Back Panel Support Clip













Step 1.
Seat dowel (F) into holes in end panel (B) as shown.

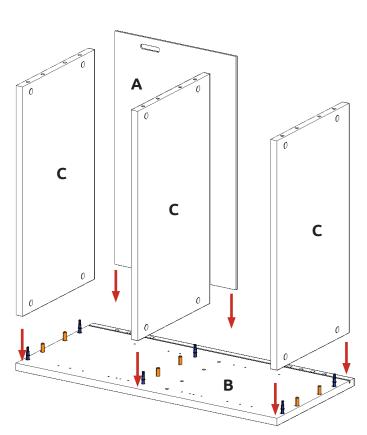


Step 2.
Seat cam dowel (G) into holes in end panel (B) as shown.




Step 3.
Attach panels x 3 (C) to panel (B), using cam dowels (G) (in blue), and also using dowels (F) (in orange) in positions as shown.


**Step 4.**Slide panel **(A)** into the groove of panel **(B)**.

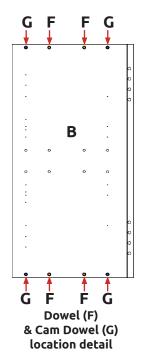



All cam locks **(H)** are to be positioned facing the outside of the unit carcase, for ease of tightening.





Do **not** use power tools with cam dowel **(G)** or cam lock **(H)** 

Step 5.
Insert cam lock (H).
Hand tighten all cam locks (H),
this will expand the
cam dowels (G) and tighten
the unit together.




## **600 Microwave Assembly Guide**


Step 6.

Seat dowel (F) into holes in end panel (B) as shown.

## Step 7.


Seat cam dowel (G) into holes in end panel (B) as shown.



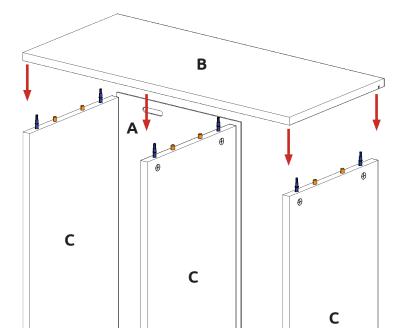

#### Step 8.

Attach panel (B) to panels x 3 (C), using cam dowels (G) (in blue), and also using dowels (F) (in orange) in positions as shown.




into hole as shown.




All cam locks **(H)** are to be positioned facing the outside of the unit carcase, for ease of tightening.

В


Do **not** use power tools with cam dowel (G) or cam lock (H)





#### Step 9.

Insert cam lock **(H)**. Hand tighten all cam locks (H), this will expand the cam dowels (G) and tighten the unit together.





#### **Step 10.**

Ensure unit is square. Secure back panel (A) with 4 x 30mm Screws (K) as shown. Ensure you screw into centres of panel (C) 9mm from the edge

#### **Step 11.**


Slide the back panel clips (T) into the groove of both panels (B) & (C). The back panel clips **(T)** should be evenly spaced as shown and positioned to allow the hanging bracket and corner gussets to be fitted. Once in place, tighten screw.





#### **Step 12.**


Secure L bracket SML (FF) to bottom left and right of wall unit using 1 x 15mm screws **(L)** per bracket, as shown.

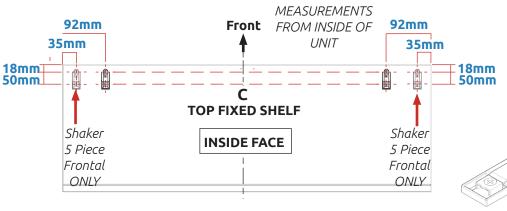


**Step 13.** 

Measure and attach hinge mounting plate onto fixed shelf (C) as shown, using screws which are already positioned within the hinge plates.



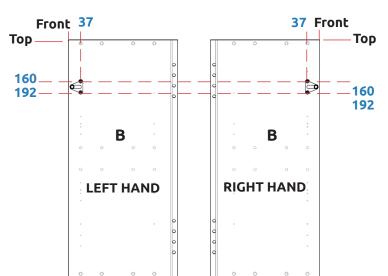



#### **Step 14.**

Measure and attach lift hinge bracket with 2 x screws per bracket. The required screws are included inside lift hinge pack.



Removed from lift hinge




## **600 Microwave Assembly Guide**




Care to be taken. Hanging procedure is necessary for a safe installation.


**Step 15.** Hanging brackets steps a,b & c to be carried out on both sides as shown




**Step a**Insert hanging
bracket into pre-drilled holes



**Step b**Rotate locking lever 180 degrees



Step c
Secure with provided
2 x 20mm screws (S) per bracket



**Step 17.** Hang the unit

Hang the unit using the brackets to hook onto the plate as shown

## Step 18.


Secure to the wall using 1 x appropriate screw through each L brackets **(FF)**.





Screws for attaching to walls are not provided as these vary depending on materials, thickness and construction. Ensure appropriate fixings for wall construction are used.


#### **Step 16.**

Measure appropriately and attach the 2 x hanging bracket plates onto the wall screwing through the provided holes into your wall.









K

Step 20.


Screw into any side units using the provided 2 x 30mm screws (K) to secure the unit. Place cover caps (M) on the head to conceal

#### **Step 19.**

Using points a, b & c adjust the unit to suit.


#### Step a.

Rotate the screw clockwise to move the unit up.
Anti-clockwise for down.




#### Step b.

Adjust the depth using centre screw.



#### Step c.

Screw the red screw until it touches the plate to lock in position.






Removed from lift hinge

#### **Step 21.**

Measure and attach lift hinge bracket to frontal with 2 x screw per bracket. The required screws are included inside lift hinge pack.

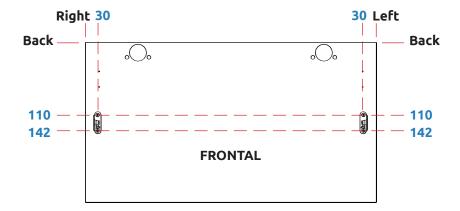


### Step 23.

Secure hinges by tightening 2 x screws with hinge dowels attached. These are already positioned within the hinges.


## Step 22.

Insert hinges into holes as shown.




## Vogne WALL UNIT

## **600 Microwave Assembly Guide**

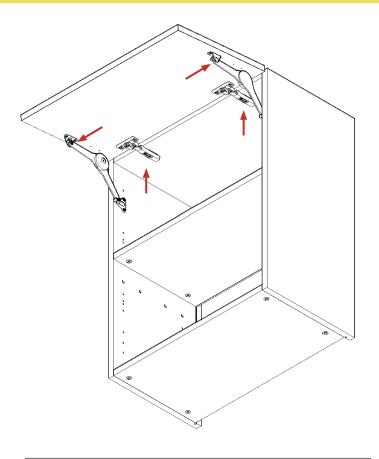

**Step 24.**Clip hinges into hinge mounting plates on the unit.


**Step 25.** Clip lift hinge mechanisms into each bracket.




## Step 26.

Use a 4mm allen key to adjust the strength of the lift hinge for the door weight.

The left and right hinges **MUST** be adjusted to the **SAME STRENGTH.** 



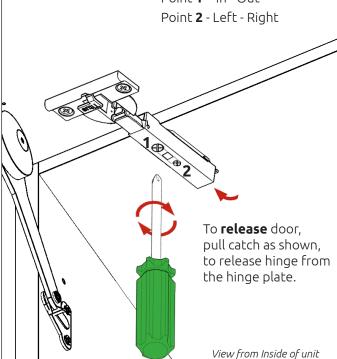

**Step 27.** Fit cover caps to hinge. Adjust Softclose to suit.

